

SCHOTTKY BARRIER DIODE

●Applications

Low current rectification and high speed switching

●Features

Extremely small surface mounting type. (SC-79/SOD523)

Extremely Fast Switching Speed

Extremely Low Forward Voltage 0.5 V (max) @ IF = 200 mA

Low Reverse Current


S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements;
AEC-Q101 Qualified and PPAP Capable.

●Construction

Silicon epitaxial planar

- We declare that the material of product compliance with RoHS requirements.

LRB521S-30T1G
S-LRB521S-30T1G



DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LRB521S-30T1G S-LRB521S-30T1G	5M	3000/Tape&Reel
LRB521S-30T3G S-LRB521S-30T3G	5M	10000/Tape&Reel

MAXIMUM RATINGS (T_A = 25°C)

Parameter	Symbol	Limits	Unit
DC reverse voltage	V _R	30	V
Mean rectifying current	I _o	200	mA
Peak forward surge current*	I _{FSM}	1	A
Junction temperature	T _j	125	°C
Storage temperature	T _{sg}	-40~+125	°C

*60Hz for 1cycle.

ELECTRICAL CHARACTERISTICS(T_A = 25°C)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Forward voltage	V _F	-	-	0.50	V	I _F =200mA
Reverse current	I _R	-	-	30	μA	V _R =10V

Electrical characteristic curves(Ta=25°C)

LRB521S-30T1G ,S-LRB521S-30T1G

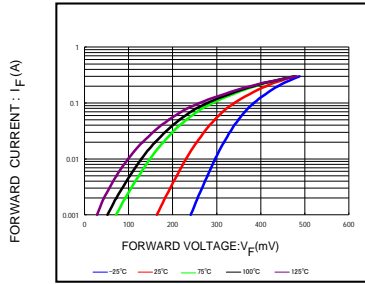


Fig. 1 Forward characteristics

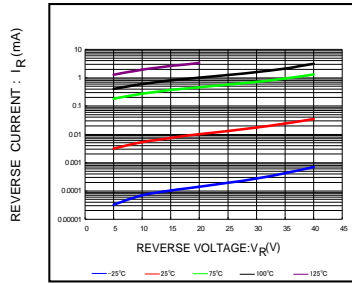


Fig. 2 Reverse characteristics

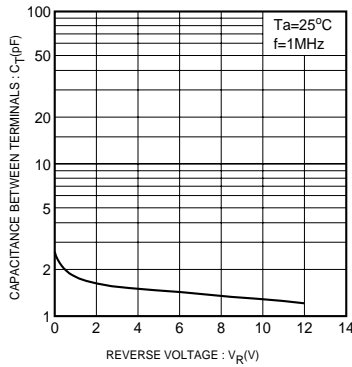
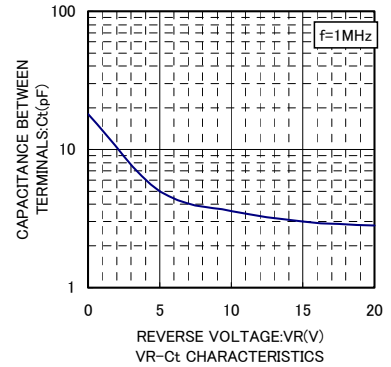


Fig. 3 Capacitance between terminals characteristics



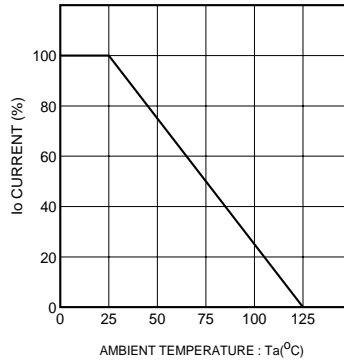



Fig. 4 Derating curve (mounting on glass epoxy PCBs)

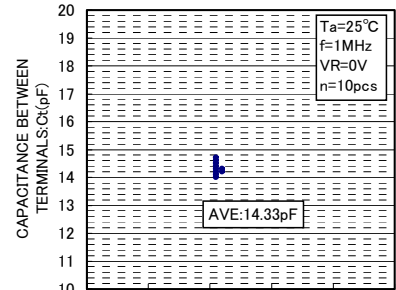


Ct DISPERSION MAP

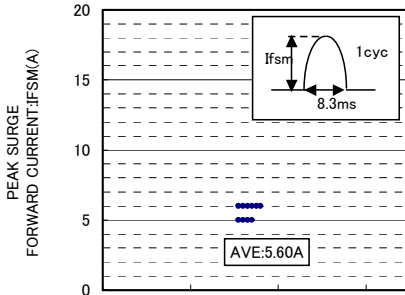


IFSM DISPERSION MAP

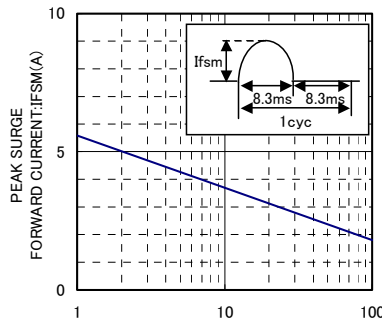


IFSM-CYCLE CHARACTERISTICS

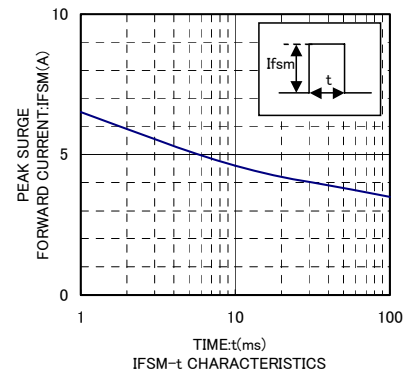


IFSM-t CHARACTERISTICS

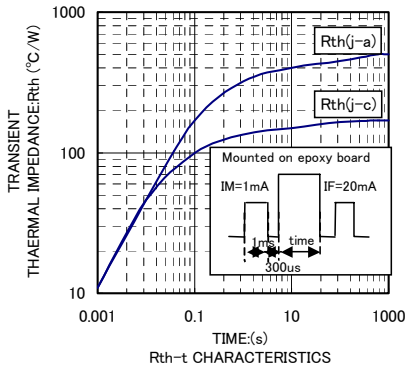

Rth-t CHARACTERISTICS

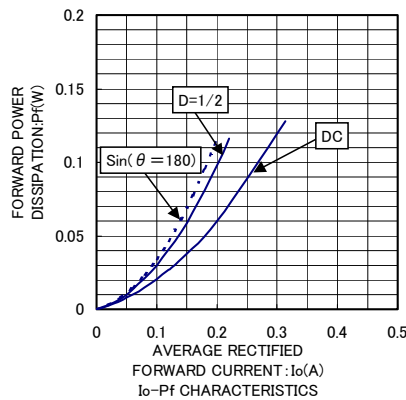



Io-Pf CHARACTERISTICS

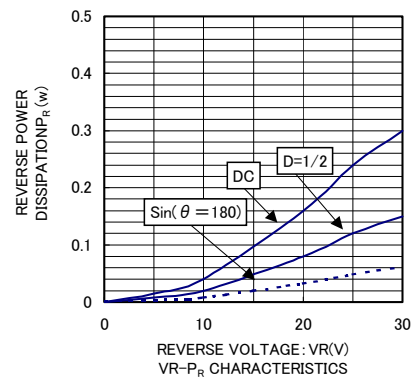


VR-PR CHARACTERISTICS

LRB521S-30T1G ,S-LRB521S-30T1G

SC-79/SOD-523

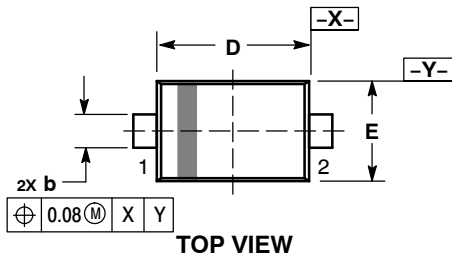

**RECOMMENDED
SOLDERING FOOTPRINT***

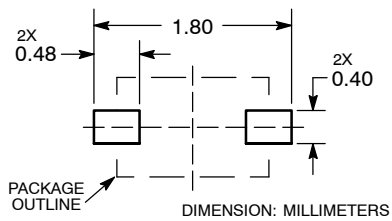

NOTES:

2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH.

BASE MATERIAL.

4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.50	0.60	0.70
b	0.25	0.30	0.35
c	0.07	0.14	0.20
D	1.10	1.20	1.30
E	0.70	0.80	0.90
H _E	1.50	1.60	1.70
L	0.30 REF		
L2	0.15	0.20	0.25